

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 84114632.7

(51) Int. Cl.⁴: H 01 J 37/32

(22) Date of filing: 01.12.84

(30) Priority: 06.01.84 US 568859

(43) Date of publication of application:
24.07.85 Bulletin 85/30

(84) Designated Contracting States:
DE GB

(71) Applicant: **TEGAL CORPORATION**
11 Digital Drive
Novato California 94947(US)

(72) Inventor: **Celestino, Salvatore A.**
1000 Ignacio Boulevard
Novato, California 94947(US)

(72) Inventor: **Gorin, Georges J.**
1847 Hoke Court
Pinole, California 94564(US)

(72) Inventor: **Hilliker, Stephen E.**
2000 Clelia Lane
Petaluma, California 94952(US)

(72) Inventor: **Powell, Gary B.**
20 West Street
Petaluma, California 94952(US)

(74) Representative: **Ibbotson, Harold et al,**
Motorola Ltd Patent and Licensing Operations - Europe
Jays Close Viablos Industrial Estate
Basingstoke Hampshire RG22 4PD(GB)


(54) Single electrode, multiple frequency plasma apparatus.

(57) Plasma processing is accomplished with an improved single electrode reactor apparatus. High and low frequency power supplies are coupled to the single electrode by way of a multi-stage passive filter network which performs the functions of coupling both power supplies to the electrode, isolating the low frequency power supply from the high frequency power supply, and attenuating the undesired frequencies produced by mixing of the two frequencies in the non-linear load presented by the reactor.

EP 0 149 089 A2

/...

FIG. 1

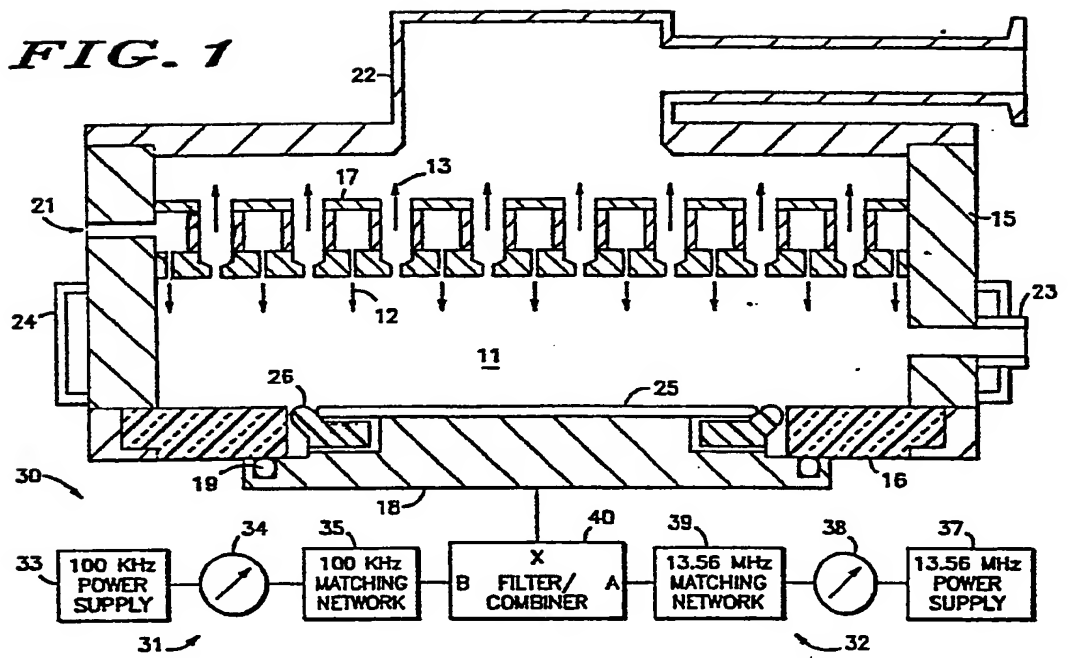

Field of the Invention

10 Background of the Invention

A particular need exists in the area of metal etching processes. In order to achieve the desired end result, it is necessary to adequately remove any organic and/or inorganic residues from the etched surface. Prior art etching processes have proved lacking in one respect or

another in providing an adequately clean surface following a metal etching step.

Summary of the Invention

5

Accordingly, it is an object of the present invention to provide an improved plasma reactor apparatus and method.

10 A further object of the present invention is to provide a plasma reactor apparatus and method by which a single electrode may be used to apply power of more than one frequency to the reaction volume.

15 Yet a further object of the present invention is to provide an improved method and apparatus for metal etching whereby surface residues, both organic and inorganic, are effectively removed.

20 A particular embodiment of the present invention comprises a plasma reactor apparatus having an enclosure and an electrode. The electrode is adapted to carry the workpiece and also mates to the lower portion of the enclosure to seal the reaction volume. In addition, the electrode is electrically insulated from the enclosure. A manifold is provided within the enclosure to distribute the input reactive gases and to allow reaction products to be
25 exhausted by means of a vent connected to a vacuum pump. Typically, temperature control means such as water jackets are provided in the enclosure and the electrode. Also, an optical window is provided for purposes of process monitoring.

30 A power supply apparatus, which is coupled to the single electrode by an RF transmission line, comprises a low frequency power supply and a high frequency power supply. Typically, the low frequency power supply operates at approximately 100 KHz and the high frequency power
35 supply operates at approximately 13.56 MHz. Both power supplies are coupled to the electrode through coupling

networks which serve to optimize RF transmission through impedance matching. It is necessary to efficiently couple both the high and low frequency power supplies to the electrode while providing isolation between the power
5 supplies. Furthermore, the problem of coupling RF power to a non-linear load such as a plasma reactor is very complex. This is especially true in the case of commercial units which must meet stringent government limits on emitted radiation. To meet these needs, a special combining means
10 is provided which couples both power supplies to the electrode and provides isolation while suppressing heterodyne products of the two frequencies caused by the non-linear nature of the load.

A particular embodiment of the invention comprises a
15 method of metal etching utilizing the previously described apparatus which has proved particularly useful for aluminum etching. For instance, it has been found that a reactive atmosphere comprising carbon tetrachloride, chlorine, and argon which is subjected simultaneously to 250 watts at
20 13.56 MHz and 20 watts at 100 KHz provides excellent etching of an aluminum/silicon/1% copper layer. The surface remaining after such an etching process is substantially cleaner than that left by prior art processes.

25 These and other objects and advantages of the present invention will be apparent to one skilled in the art from the detailed description below taken together with the drawings.

30 Brief Description of the Drawings

FIG. 1 is a schematic cross-sectional view of an apparatus according to a particular embodiment of the present invention; and

FIG. 2 is a schematic diagram of a combining means according to a particular embodiment of the present invention.

5 Detailed Description of the Invention

Referring to FIG. 1, a plasma reactor apparatus according to the principles of the present invention is illustrated in cross-section. Plasma reactor 10 is
10 designed, in broad terms, to enclose a reaction volume 11, supply a reactive gas mixture 12 thereto, exhaust reaction products 13 therefrom, and impose an RF electric field therein. An enclosure 15 which includes a ceramic insulator lower portion 16, a manifold 17 and an electrode
15 18 serve to define reaction volume 11. Enclosure 15 is conductive and electrically grounded. Electrode 18 is adapted to sealably engage ceramic insulator 16 and is supplied with an O-ring seal 19 to accomplish an adequate seal therebetween. Manifold 17 is coupled to a supply
20 means 21 and is adapted to supply reactive gas 12 to reaction volume 11. In addition, manifold 17 directs reaction products 13 comprising used and unused reactive gas and chemical products of the reaction to a vent 22 so that they may be exhausted by a vacuum pump which is not
25 shown. Manifold 17 may be of the type disclosed in U.S. Patent 4,209,357 issued June 24, 1980 and assigned to the assignee of the present invention.

Plasma reactor apparatus 10 also includes an optical window 23 in enclosure 15 whereby the optical properties of
30 the plasma in reaction volume 11 may be monitored. In addition, a temperature control device such as water jacket 24 is provided. As is well-known in the art, it is also common to provide temperature control devices such as water jackets and/or heating devices in electrode 18.

35 Electrode 18 serves the dual purpose of energizing reactive gas 12 and providing the means by which workpieces

are loaded and unloaded from reaction volume 11. During the loading process electrode 18 is lowered away from ceramic insulator 16, whereby access to reaction volume 11 is provided. In addition, electrode 18 is adapted to serve as a workpiece holder. A semiconductor wafer 25, which is surrounded and carried by a wafer ring 26, is supported by electrode 18. This single electrode arrangement is particularly advantageous in that it readily interfaces with an automated wafer transport system.

5 A power supply apparatus 30 is coupled to electrode 18 to supply RF power thereto. According to the present invention, power supply apparatus 30 comprises a low frequency portion 31 and a high frequency portion 32. In the nomenclature associated with plasma reactors and plasma processes it is common to describe as "high frequency" any frequency greater than about 10 MHz. Similarly, "low frequency" is used to describe any frequency less than approximately 1 MHz. The use of combined high and low frequencies in plasma processes has been described for a multiple electrode reactor apparatus. It has not been known heretofore that multiple frequencies could be successfully combined in a single electrode apparatus.

10 In the particular case of this embodiment of the present invention, low frequency portion 31 of power supply 30 comprises a 100 KHz power supply 33, a power meter 34 and a 100 KHz matching network 35. Power meter 34 serves to monitor the power level of the 100 KHz power being supplied to reaction volume 11. Matching network 35 serves to optimize the transmission of 100 KHz power to electrode 18 by means of impedance matching. Matching network 35 may comprise, for instance, an impedance transformer. Similarly, high frequency portion 32 of power supply 30 comprises a 13.56 MHz power supply 37, a power meter 38 and a 13.56 MHz matching network 39. Matching network 39 may comprise, for instance, an automated slug-tuning apparatus.

A combining means 40 is coupled between low frequency power supply 31, high frequency power supply 32 and electrode 18. Ports A and B of combining means 40 are coupled to high frequency power supply 31 and low frequency power supply 32, respectively. Port X of combining means 40 is coupled to electrode 18. Combining means 40 must serve three purposes which are unique to a single electrode, dual frequency plasma reactor. First, the high frequency power must be largely prevented from reaching the low frequency power supply to prevent damage. The converse of this isolation problem is provided by 13.56 MHz matching network 39. Second, the heterodyne products caused by the coupling of two different frequencies to a non-linear load (the plasma reactor) must be attenuated in order to comply with government regulations. Third, the radiation emitted by the reactor and the various interconnections must be minimized.

Referring now to FIG. 2, combining means 40 is shown schematically. Ports A, B and X are shown schematically as coaxial connectors, since the interconnection of the various elements is generally accomplished with coaxial cable. Each of the indicated ground connections in combining means 40 is coupled to the same ground as is enclosure 15 (FIG. 1). This minimizes ground currents. In broad terms, combining means 40 comprises first through sixth stages 45, 46, 47, 48, 49 and 50, respectively, coupled between port X and port B. Port A is coupled out between first stage 45 and second stage 46.

First stage 45 of combining means 40 is a parallel tank circuit made up of inductor 51 and capacitor 52. In a particular embodiment, first stage 45 is intended to attenuate the 40.68 MHz heterodyne product. Inductor 51 has a value of 0.153 μ h and capacitor 52 has a value of 100 pf.

Second stage 46 is also a tank circuit which comprises an inductor 53 and a capacitor 54. In the particular

embodiment, second stage 46 is intended to attenuate the 13.56 MHz signal between ports A and B. This provides the required isolation and prevents stages three through six from altering the 13.56 MHz matching. Inductor 53 has a
5 value of 1.38 μ h and capacitor 54 has a value of 100 pf.

Third stage 47, which is connected in series with first stage 45 and second stage 46, comprises a cored inductor 55 and its parallel parasitic capacitance 56. In the particular embodiment, third stage 47 serves to
10 attenuate the 27.12 MHz heterodyne product between ports X and B. Inductor 55 has a value of 10 μ h and parasitic capacitance 56 has a value of 3.4 pf.

Fourth stage 48 is coupled between the line between ports X and B and ground. In addition, electro-magnetic
15 coupling between third stage 47 and fourth stage 48 is prevented by grounded shield 57. Fourth stage 48 combines with first stage 45 and fifth stage 49 to attenuate the 40.68 MHz heterodyne product between ports X and B. Fourth stage 48 comprises an inductor 58 and a series-connected
20 capacitor 59. Inductor 58 has a value of 0.2 μ h and capacitor 59 has a value of 75 pf.

Fifth stage 49, another parallel tank circuit series-connected between ports X and B, comprises a cored inductor 60 and its parallel parasitic capacitance 61.
25 Like fourth stage 48, it is resonant at 40.68 MHz in the particular embodiment. Inductor 60 has a value of 5 μ h and parasitic capacitance 61 has a value of 3 pf.

A second grounded shield 62 separates fifth stage 49 from sixth stage 50. Sixth stage 50, which serves to
30 attenuate the 67.8 MHz heterodyne product between ports X and B, comprises an inductor 63 and a series-connected, grounded capacitor 64. Inductor 63 has a value of 0.07 μ h and capacitor 64 has a value of 75 pf.

Combining means 40 is typically augmented by ensuring
35 good RF contact between the various panels which make up the cabinet of the plasma reactor apparatus to contain any

radiation which might exist. Combining means 40 represents a delicate compromise between being able to provide good impedance matching and providing the necessary attenuation of harmonics.

5 The combination of high and low frequencies in plasma processes has been found to offer increased flexibility and control. Generally, this is due to the fact that the degree of dissociation and the ion energy cross-section in the plasma are strong functions of frequency, as is the ion
10 energy. In other words, different percent dissociations and ion energy cross-sections are produced at the high and low frequencies with higher ion energies being present in the low frequency discharge. Therefore, by controlling the relative power levels of the two power supplies in the
15 disclosed apparatus a process which combines a high etch rate with excellent residue removal is achievable.

In particular, the dual frequency, single electrode reactor apparatus disclosed herein is well-suited to metal etching processes. By way of example, a process for
20 etching aluminum/silicon with an admixture of 1% copper is described. In this process, the 13.56 MHz power supply is operated at 250 watts and the 100 KHz power supply is operated at 20 watts. The reactive gas comprises 50 standard cubic centimeters per minute (sccm) of carbon
25 tetrachloride, 15 sccm of chlorine and 40 sccm of argon. The system operating pressure is maintained at 270 mtorr. The etch rate of this process is roughly 7000 to 8000 Å/min. It has been found that the described process provides excellent etching characteristics and
30 further provides a surface which is substantially clear of organic and inorganic contaminants. Prior art metal etching processes generally leave substantial residues which may affect subsequent processing steps and the long term reliability of the finished device.

35 The plasma reactor apparatus and method described above provide an improvement in plasma processes. The

present invention combines the advantages of a dual frequency plasma process with the simplicity and commercial advantage of a single electrode reactor. In addition, the disclosed method for etching metals provides a substantially cleaner surface than did prior art methods.

While the present invention has been disclosed with reference to a particular embodiment thereof, various modifications and changes will be apparent to those skilled in the art and may be made without departing from the spirit and scope of the invention.

Claims

1. A single electrode, multiple frequency plasma apparatus comprising:
 - 5 a reaction volume (11) for containing a reactive gas and a workpiece;
means (21, 22) for supplying said reactive gas to and exhausting reaction products from said reaction volume;
 - 10 an electrode (18) adapted to produce electric fields within said reaction volume; and
at least two power supply means (33, 37) of different frequencies coupled to said electrode.
- 15 2. The plasma apparatus according to claim 1 wherein said at least two power supply means further comprise:
 - a low frequency power supply coupled to said electrode by means of a matching network;
 - a high frequency power supply coupled to said
20 electrode by means of a matching network; and
isolation means for preventing the coupling of said high frequency power supply to said low frequency power supply.
- 25 3. The plasma apparatus according to claim 2 wherein said isolation means further comprises:
 - a filter/combiner coupled between said low frequency power supply, said high frequency power supply and said electrode, said filter/combiner being adapted to
30 couple said low and high frequency power supplies to said electrode, isolate said low frequency power supply from said high frequency power supply and attenuate undesired mixing products of said high and low frequencies.
- 35 4. The plasma apparatus according to claim 3 wherein said filter/combiner further comprises:

a multi-stage passive filter network having at least one stage for attenuating said high frequency between said high frequency power supply and said low frequency power supply and at least one stage for attenuating
5 undesired mixing products.

5. A single electrode, multiple frequency plasma apparatus comprising:
enclosure means (15) for partially defining a
10 reaction volume;
means (21, 22) for supplying a reactive gas to and exhausting reaction products from said reaction volume;
an electrode (18) adapted to mate with said
15 enclosure means to sealably enclose said reaction volume, said electrode being electrically insulated from said enclosure means and being adapted to support a workpiece; and
power supply means (30) coupled to said electrode
20 for supplying power of at least one low frequency and at least one high frequency.

6. The plasma apparatus according to claim 5 wherein said enclosure means is electrically grounded.
25

7. The plasma apparatus according to claim 5 wherein said power supply means further comprises:
a low frequency power supply coupled to said electrode;
30 a high frequency power supply coupled to said electrode; and
isolation means coupled between said low frequency and high frequency power supplies to prevent coupling of said high frequency power to said low frequency
35 power supply and for attenuating undesired mixing products.

8. The plasma apparatus according to claim 7 wherein said isolation means further comprises:

a filter/combiner coupled between said low and high frequency power supplies and said electrode, said
5 filter/combiner providing coupling of each of said power supplies to said electrode, isolation of said low frequency power supply from said high frequency power supply, and attenuation of undesired frequencies produced by mixing of said low and high frequencies.

10

9. A single electrode, multiple frequency plasma apparatus comprising:

a reaction chamber (11) for containing a reactive gas and a workpiece;

15 means (21, 22) for supplying said reactive gas to and exhausting reaction products from said reaction volume;

an electrode (18) adapted to produce electric fields within said reaction volume;

a source (33) of low frequency electrical power;


20 a source (37) of high frequency electrical power; and


combining means (40) coupled to said electrode and to said sources for applying said low frequency electrical power and said high frequency electrical power
25 to said electrode while isolating said sources from each other.

10. The plasma apparatus as set forth in claim 9 wherein said combining means comprises:

30 a multi-stage passive filter network having at least one stage for attenuating said high frequency and at least one stage for attenuating heterodyne products of said frequencies.

FIG. 1

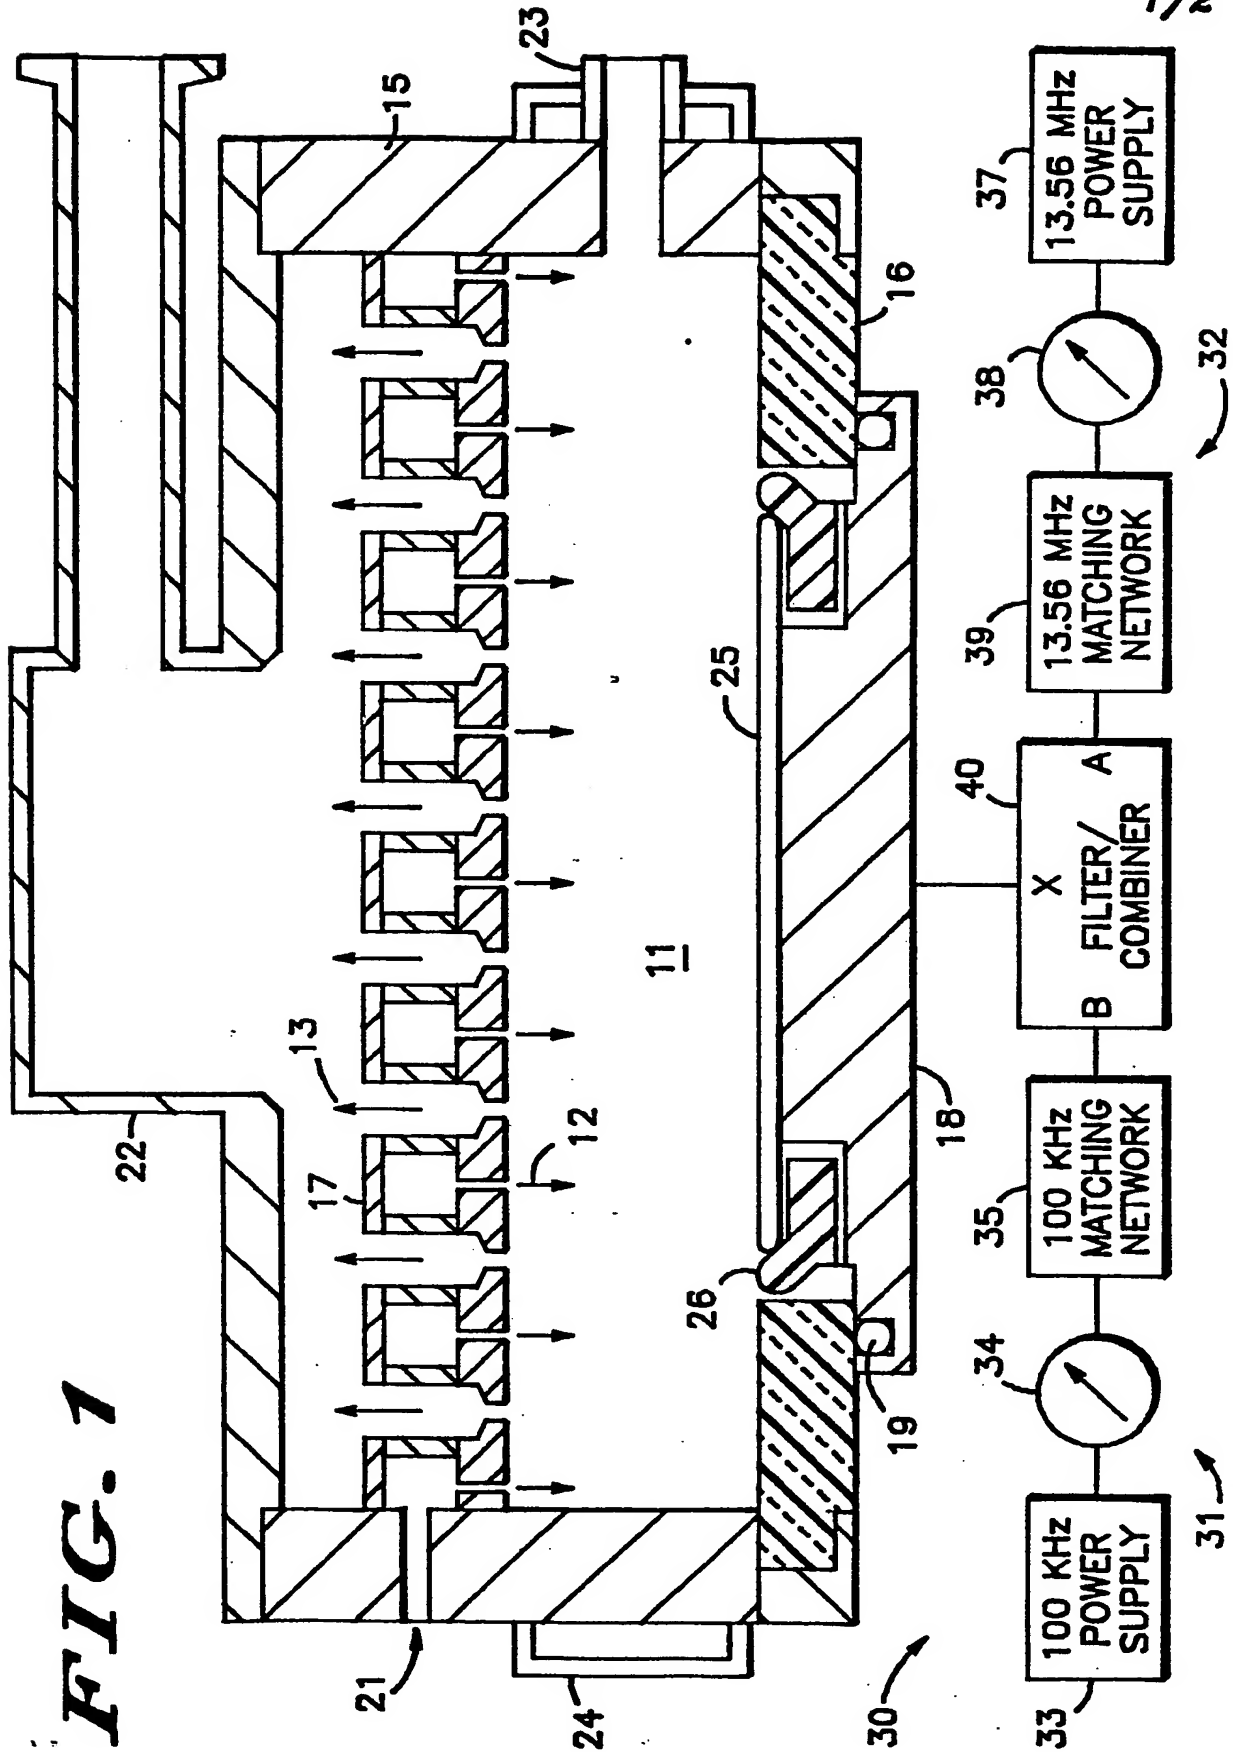

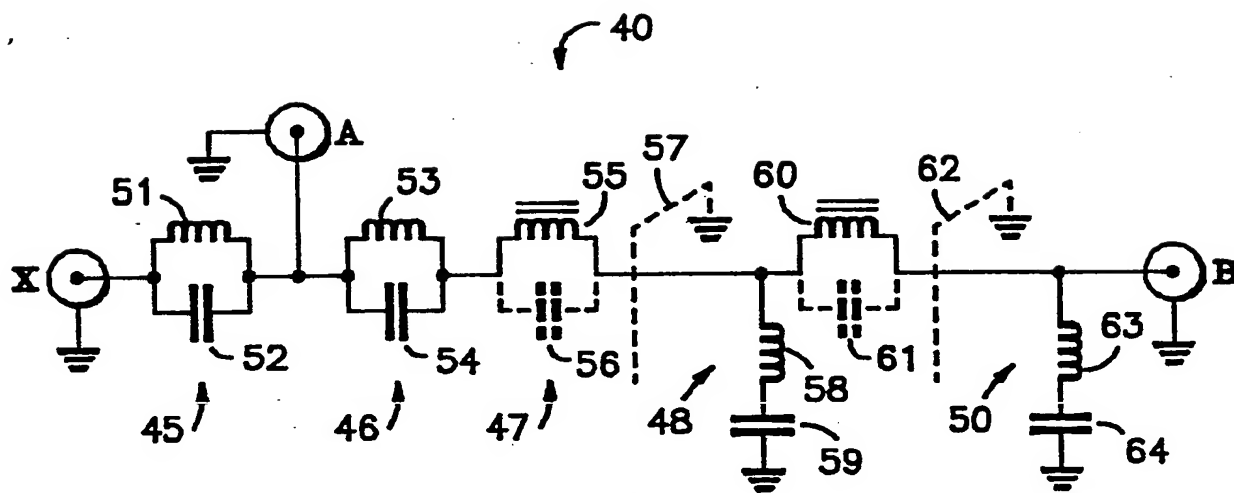**FIG. 2**